


THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC		DIST		REVISIONS			DATE	DWN	APVD
P	LTR								
-	-	-	-	-	-	-	-	-	

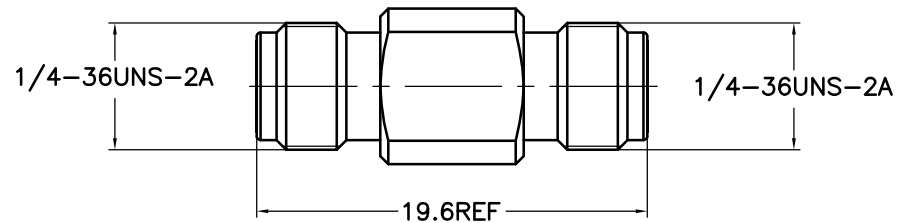

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~34GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR: 1.25:1 Max@DC~34GHz
- 1.6 INSERTION LOSS: 0.5dB Max@34GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

BODY: STAINLESS STEEL TYPE 303, PASSIVATE
 CENTER CONTACT: BERYLLIUM COPPER,
 GOLD PLATING
 DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DWP	18/02/2008	Micable Inc.			
		CHK						
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME			
		0 PLC	±0.25		3.5 mm Female TO			
		1 PLC	±0.15		3.5 mm Female Adapter			
		2 PLC	±0.12					
		3 PLC	±					
MATERIAL		FINISH			SIZE	CAGE CODE	DRAWING NO	
SEE TABLE		SEE TABLE			A3	00779	20110001	
CUSTOMER DRAWING					SCALE	4: 1	SHEET 1 OF 1	RVE 1