


THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC		DIST		REVISIONS			DATE	DWN	APVD
P	LTR								
-	-	-	-	-	-	-	-	-	

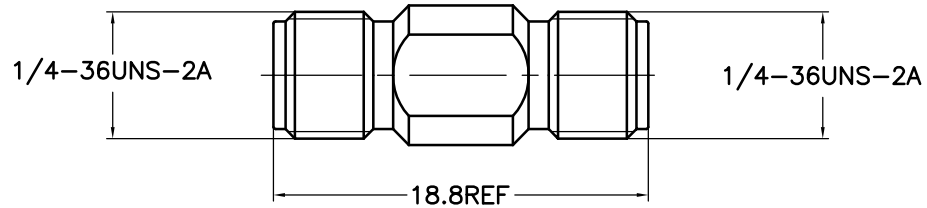

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR: 1.30:1 Max@DC~40GHz
- 1.6 INSERTION LOSS: 0.6dB Max@40GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

BODY: STAINLESS STEEL TYPE 303, PASSIVATE
 CENTER CONTACT: BERYLLIUM COPPER,
 GOLD PLATING
 DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DWP	18/02/2008	Micable Inc.	
		CHK			
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 2.92 mm Female TO 2.92 mm Female Adapter	
		0 PLC ±0.25		PRODUCT SPEC	
		1 PLC ±0.15		---	
		2 PLC ±0.12		APPLICATION SPEC	
		3 PLC ±		---	
MATERIAL SEE TABLE		4 PLC ±		SIZE A3	
		ANGLES ±1°		CAGE CODE 00779	
FINISH SEE TABLE		WEIGHT ---		DRAWING NO 20120002	
CUSTOMER DRAWING				SCALE 4: 1	SHEET 1 OF 1
				RVE 1	